




FABBRICA CAVI - ANTENNE - ACCESSORI TV



T-AMAZONE

Flat Audio cable 2x0,22 mm²

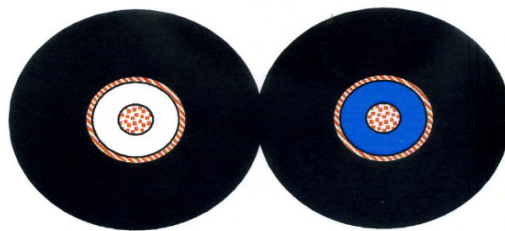

CABLE ARTICLE: P020022ST

CONSTRUCTION

<i>Inner Conductor</i>	Strands of tinned copper wires AWG24, according to standards VDE 0295 IEC 60228 CEI 20-29		
<i>Insulation</i>	Polyolefin dielectric according to VDE 0207 part. 4 - CEI 20-11 - CEI EN 50363 1/10 color white, blue - $\varnothing = 1,2$ mm approx.		
<i>Cores shield</i>	Bare copper spiral coverage 100%		
<i>Jacket</i>	PVC matt compound according to VDE 0207 part. 5 - CEI 20-11 - IEC 60332-1 - CEI EN 50363 1/10 - color black - $\varnothing = 3,5 \times 6,5$ mm approx.		
<i>Printing</i>	TESCA AMAZONE ww/yyyy CE + metrica		

MECHANICAL CHARACTERISTICS

<i>Temperature range service</i>	-20°C ÷ +80°C	<i>Min. bend radius service</i>	15 x \varnothing
<i>Temperature range fix</i>	-40°C ÷ +80°C	<i>Min. bend radius fix</i>	10 x \varnothing
<i>Weight</i>	44 Kg/Km approx.		

ELECTRICAL CHARACTERISTICS (Mathematical expectation) [≠]

<i>Ohm. Cond. Resistance</i>	< 87 Ohm/Km at 20°C	<i>Capacity</i>	176 pF at 20°C
<i>Nominal Voltage</i>	300 V	<i>Insulation resistance</i>	> 10 Gohm x Km at 20°C
<i>Current rating</i>	2,8 A at 20°C	<i>Test Voltage</i>	2000 V